

## Catalog

1. Summary .....	- 2 -
2. Hardware Description.....	- 4 -
2.1 PIN Definition .....	- 4 -
2.2 Packaging Dimension .....	- 9 -
2.3 Basic performance parameters.....	- 9 -
2.4 Notices for Hardware Design .....	- 10 -
3. OS CPU Description.....	- 11 -
3.1 Initial Configuration .....	- 11 -
3.2 Memory .....	- 12 -
3.2.1 Code memory(64KBytes).....	- 12 -
3.2.2 DGUS Variable Memory(256KBytes).....	- 13 -
3.2.3 Data Memory(32KBytes) .....	- 15 -
3.2.4 Extended SFR register .....	- 16 -
3.3 Mathematical operating unit(MDU) .....	- 17 -
3.4 Timer .....	- 18 -
3.5 Watchdog Timer(WDT).....	- 20 -
3.6 IO.....	- 20 -
3.7 UART communication interface.....	- 22 -
3.7.1 UART2 interface.....	- 22 -
3.7.2 UART3 interface.....	- 22 -
3.7.3 UART4 interface.....	- 23 -
3.7.4 UART5 interface.....	- 24 -
3.8 CAN communication interface .....	- 24 -
3.9 Interrupt system .....	- 27 -
3.9.1 Interrupt control SFR.....	- 27 -
3.9.2 Interrupt priority .....	- 27 -
3.10 8051 Instruction set of T5L ASIC.....	- 29 -
4. Simulation Debug.....	- 31 -
5. EK043 Evaluation Board.....	- 33 -
Appendix 1 .....	- 34 -

## (4) Summary



The T5L series ASIC is a single-chip and dual-core ASIC IC designed by DWIN technology co., ltd for AIOT applications with low power consumption, high cost performance, GUI and highly integrated application, including T5L1(low resolution) and T5L2(high resolution). Its main features are as follow:

- (2) Using 8051 core which is the most widely used, mature and stable, the maximum operating frequency of T5L is up to 250MHZ, 1T(single instruction cycle)high speed operation.
- (3) Separated GUI CPU Core running DGUS II System:
  - (1) High-speed display memory, 2.4 GB/S bandwidth, 24bit color display resolution supporting to 800\*600(T5L1) or 1366\*768(T5L2).
  - (2) 2D hardware acceleration, the decompression speed of JPEG is up to 200fps@1280\*800, the UI interface with animation and icons as its main feature is extremely cool and smooth.
  - (3) JPEG stores images and icons in compressed mode, external memory greatly reduced to low-cost 16Mbytes SPI Flash.
  - (4) With maximum 400 Hz touch point speed, touch screen supports resistance or capacitance, and its sensitivity can be adjusted.
  - (5) High-quality speech compression storage and playback.
  - (6) 128Kbytes variable storage space, exchanging data with OS CPU Core using memory interface, extremely simple to apply.
  - (7) 2-way 10bit, 800KHz, DC/DC controller, simplify LED backlight, analog power supply design and save cost and space.

- 
- (8) 1-way 15bit32Ksps PWM digital power amplifier driver loudspeaker, save power amplifier cost and achieve high signal-to-noise ratio and sound quality restoration.
  - (9) Supporting PC configuration development and simulation,supporting background remote upgrade.
  - (4) Separated CPU (OS CPU) core runs user 8051 code or DWIN OS system, user CPU is omitted in practical application.
  - (10)Standard 8051 architecture and instruction set, 64Kbytes code space, 32Kbytes on-chip RAM.
  - (11)64 bit integer mathematical operation unit(MDU), including 64 bit MAC and 64 bit divider.
  - (12)Built-in software WDT, three 16 bit Timers, 12 interrupt signals with the highest four interrupt nesting.
  - (13)22 IO, 4-channel UARTS,1-channel CAN interface, up to 8-channel 12-bit A/D, 1-channle 16-bit resolution adjustable PWM.
  - (14)Support IAP on-line simulation and debugging, unlimited number of breakpoints.
  - (15)Upgrade code online through DGUS system.
  - (5) 1Mbytes on-chip Flash with DWIN patent encryption technology ensure code and data security, eliminate copycat and cloning.
  - (6) Reduces crystal requirements and PCB design challenges for a variety of inexpensive wide-range tuned impedance crystal oscillators and PLLs.
  - (7) 3.3V IO voltage, can adapt to 1.8/2.5/3.3 various levels.
  - (8) Supporting SD interface or UART1 download and configuration, supporting SD card file reading and rewriting.
  - (9) Supporting DWIN WiFi module to access to DWIN cloud directly, and easily developing various cloud platform applications.
  - (10) Working temperature ranges from - 40°C to +85°C (Customizable IC for -55°C to 105°C operating temperature range )
  - (11)With low power consumption and strong anti-interference ability, it can work steadily on the double-sided PCB design, and easy to pass EMC/EMI test.
  - (12) Using 0.4mm ELQFP128 packaging, low manufacturing difficulty and low cost.
  - (13)Providing T5L IC + LCD + touch screen + design support for industry customers with cost-effective matching program sales and comprehensive technical service support.

## (5) Hardware Description

### • PIN Definition

T5L ASIC is packaged in ELQFP128 (16\*16\*1.5mm), pins arrangement are shown in Fig 2-1.

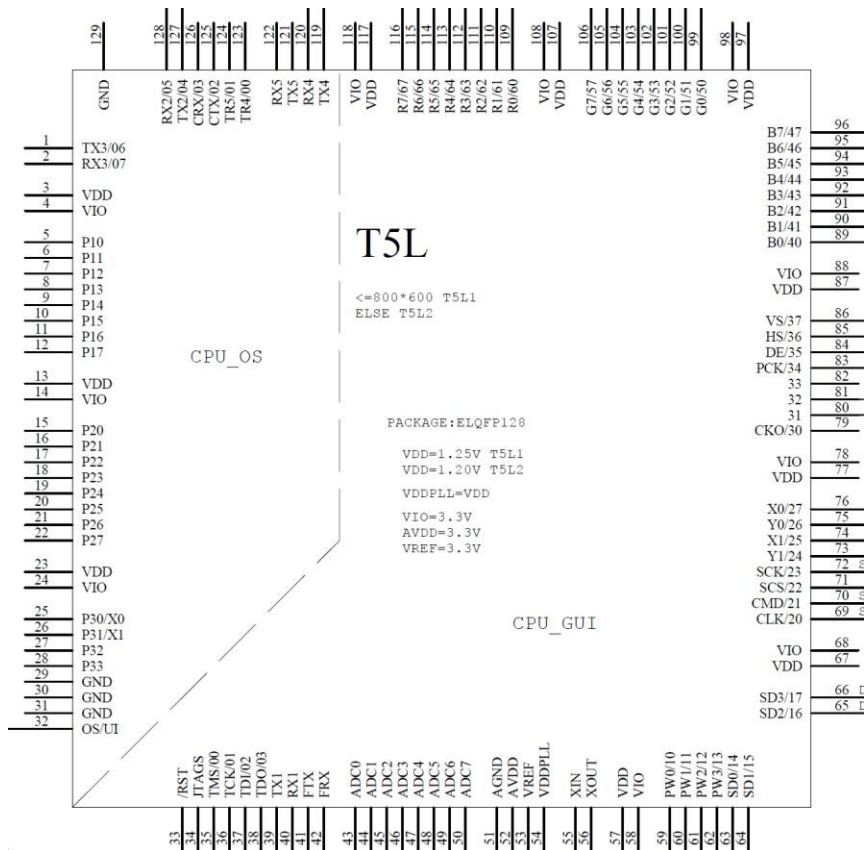


Fig.2-1 The arrangement of T5L pin

C P	PI N#	Definition					
		Funcio	Instructions	Function	Instructions	Function	Instructions
O	1	TX4	UART4 data				
O	1	RX4	UART4 data reception				
O	1	TX5	UART5 data				
O	1	RX5	UART5 data reception				
O	1	P0.0	I/O port				
O	1	P0.1	I/O port				
O	1	P0.2	I/O port	CAN_T	CAN interface data transmittion		
O	1	P0.3	I/O port	CAN_R	CAN interface data reception		
O	1	P0.4	I/O port	TX2	UART2 data transmittion		
O	1	P0.5	I/O port	RX2	UART2 data reception		
O	1	P0.6	I/O port	TX3	UART3 data transmittion		

O	2	P0.7	I/O port	RX3	UART3 data reception		
O	3	VDD	T5L1=1.25V T5L2=1.2V				
O	4	VIO	3.3V				
O	5	P1.0	I/O port				
O	6	P1.1	I/O port				
O	7	P1.2	I/O port				
O	8	P1.3	I/O port				
O	9	P1.4	I/O port				
O	1	P1.5	I/O port				
O	1	P1.6	I/O port				
O	1	P1.7	I/O port				
O	1	VDD	T5L1=1.25V T5L2=1.2V				
O	3	VDD	T5L1=1.25V T5L2=1.2V				
O	1	VIO	3.3V				
O	1	P2.0	I/O port				
O	1	P2.1	I/O port				
O	1	P2.2	I/O port				
O	1	P2.3	I/O port				
O	1	P2.4	I/O port				
O	2	P2.5	I/O port				
O	2	P2.6	I/O port				
O	2	P2.7	I/O port				
O	2	VDD	T5L1=1.25V T5L2=1.2V				
O	3	VDD	T5L1=1.25V T5L2=1.2V				
O	2	VIO	3.3V				
O	2	P3.0	I/O port	EX0	External interrupt 0 input		
O	2	P3.1	I/O port	EX1	External interrupt 1 input		
O	2	P3.2	I/O port				
O	2	P3.3	I/O port				
	2	GND					
	3	GND					
	3	GND					
	3	OS/G UI	0:GUI JTAG, 1=OS JTAG				
	3	/RST	System reset input				
	3	JTAG	PIN35#-PIN38# Select: 0=JTAG, 1=I/O port				
G	3	P0.0	I/O port	TMS	JTAG interface	TCON_C S	LCD screen TCON
G	3	P0.1	I/O port	TCK	JTAG interface	TCON_CL K	LCD screen TCON
G	3	P0.2	I/O port	TDI	JTAG interface	TCON_DA T	LCD screen TCON
G	3	P0.3	I/O port	TDO	JTAG interface	TCON_RS	LCD screen

							TCON	
G	3	P0.4	I/O port	TX1	UART1 data transmission			
G	4	P0.5	I/O port	RX1	UART1 data reception			
G	4	P0.6	I/O port	FSK_T	FSK transceiver data			
G	4	P0.7	I/O port	FSK_R	FSK transceiver data reception			
G U	4 3	ADC 0	AD input	RTP_X 0	4-wire resistance touch screen interface			
G U	4 4	ADC 1	AD input	RTP_Y 0	4-wire resistance touch screen interface			
G U	4 5	ADC 2	AD input	RTP_X 1	4-wire resistance touch screen interface			
G U	4 6	ADC 3	AD input	RTP_Y 1	4-wire resistance touch screen interface			
G	4	ADC	AD input	IF_0.4	DC/DC 0.4V voltage feedback			
G	4	ADC	AD input	VF_1.2	DC/DC 1.25V voltage feedback			
G	4	ADC	AD input	IF_0.4				
G	5	ADC	AD input	VF_1.2				
G	5	AGN	AD GND					
G U	5 2	AVD D	AD power supply,3.3V, please as close as possible to the AVDD pin to connect the 470pJ(COG materal)					
G U	5 3	VRE F	AD reference power supply, please as close as possible to the VREF pin to connect the 470pJ(COG materal) in parallel with 105 for capacitor filtering					
G U	5 4	VDDP LL	T5L1=1.25V T5L2=1.2V,please as close as possible to the VDDPLL pin to connect the 470pJ(COG					
G	5	XIN	Crystal,10MHz-	CLK_I	3.3V clock input			
G	5	XOU	Crystal					
G	5	VDD	1.1V					
G	5	VIO	3.3V					
G	5	P1.0	I/O port	PWM	16bit PWM output			
G U	6 0	P1.1	I/O port	PWM 1	16bit PWM output	PWM_V	LCD screen AVDD	
G U	6 1	P1.2	I/O port	PWM 2	16bit PWM output	PWM_I	LCD backlight	
G U	6 2	P1.3	I/O port	PWM 3	16bit PWM output	BUZZ&SP K	Buzzer/speake r	
G U	6 3	P1.4	I/O port	SDD0	SD card interface:data	SPI_D0	SPI Flash interface:data	
G U	6 4	P1.5	I/O port	SDD1	SD card interface:data	SPI_D1	SPI Flash interface:data	
G U	6 5	P1.6	I/O port	SDD2	SD card interface:data	SPI_D2	SPI Flash interface:data	
G U	6 6	P1.7	I/O port	SDD3	SD card interface:data	SPI_D3	SPI Flash interface:data	
G	6	VDD	T5L1=1.25V					


			T5L2=1.2V				
G	6	VIO	3.3V				
G U R	6 9	P2.0	I/O port	SDCK	SD card interface:clock	PA_EN	Amplifier power switch for voice
G	7	P2.1	I/O port	SDCK	SD card interface:instructions		
G	7	P2.2	I/O port	SPI_C	SPI Flash interface:chip		
G	7	P2.3	I/O port	SPI_CL	SPI Flash interface:clock		
G U R	7 3	P2.4	I/O port	RTP_Y 1	4-wire resistance touch screen interface	CTP_SD A	Capacitan ce touch screen
G U R	7 4	P2.5	I/O port	RTP_X 1	4-wire resistance touch screen interface	CTP_IN T	Capacitan ce touch screen
G U R	7 5	P2.6	I/O port	RTP_Y 0	4-wire resistance touch screen interface	CTP_SC L	Capacitan ce touch screen
G U R	7 6	P2.7	I/O port	RTP_X 0	4-wire resistance touch screen interface	CTP_RS T	Capacitan ce touch screen
G U	7 7	VDD	T5L1=1.25V T5L2=1.2V				
G	7	VIO	3.3V				
G U	7 9	P3.0	I/O port	CLK_O UT	System clock frequency division		
G U R	8 0	P3.1	I/O port	FSK_T R	T/R switching signal for half-duplex use of SFK		
G	8	P3.2	I/O port				
G	8	P3.3	I/O port				
G U	8 3	P3.4	I/O port	LCD_PC L	LCD interface		
G	8	P3.5	I/O port	LCD_D	LCD interface		
G	8	P3.6	I/O port	LCD_H	LCD interface		
G	8	P3.7	I/O port	LCD_V	LCD interface		
G U	8 7	VDD	T5L1=1.25V T5L2=1.2V				
G	8	VIO	3.3V				
G	8	P4.0	I/O port	LCD_B	LCD interface		
G	9	P4.1	I/O port	LCD_B	LCD interface		
G	9	P4.2	I/O port	LCD_B	LCD interface		
G	9	P4.3	I/O port	LCD_B	LCD interface		
G	9	P4.4	I/O port	LCD_B	LCD interface		
G	9	P4.5	I/O port	LCD_B	LCD interface		

G	9	P4.6	I/O port	LCD_B	LCD interface		
G	9	P4.7	I/O port	LCD_B	LCD interface		
G	9	VDD	T5L1=1.25V T5L2=1.2V				
U	7						
G	9	VIO	3.3V				
G	9	P5.0	I/O port	LCD_G	LCD interface		
G	1	P5.1	I/O port	LCD_G	LCD interface		
G	1	P5.2	I/O port	LCD_G	LCD interface		
G	1	P5.3	I/O port	LCD_G	LCD interface		
G	1	P5.4	I/O port	LCD_G	LCD interface		
G	1	P5.5	I/O port	LCD_G	LCD interface		
G	1	P5.6	I/O port	LCD_G	LCD interface		
G	1	P5.7	I/O port	LCD_G	LCD interface		
G	1	VDD	T5L1=1.25V T5L2=1.2V				
U	0						
G	1	VIO	3.3V				
G	1	P6.0	I/O port	LCD_R	LCD interface		
G	1	P6.1	I/O port	LCD_R	LCD interface		
G	1	P6.2	I/O port	LCD_R	LCD interface		
G	1	P6.3	I/O port	LCD_R	LCD interface		
G	1	P6.4	I/O port	LCD_R	LCD interface		
G	1	P6.5	I/O port	LCD_R	LCD interface		
G	1	P6.6	I/O port	LCD_R	LCD interface		
G	1	P6.7	I/O port	LCD_R	LCD interface		
G	1	VDD	T5L1=1.25V T5L2=1.2V				
U	1						
G	1	VIO	3.3V				

Note that the pad on the bottom of the IC must be grounded reliably, otherwise the performance of the IC will be affected.



• **Packaging Dimension**

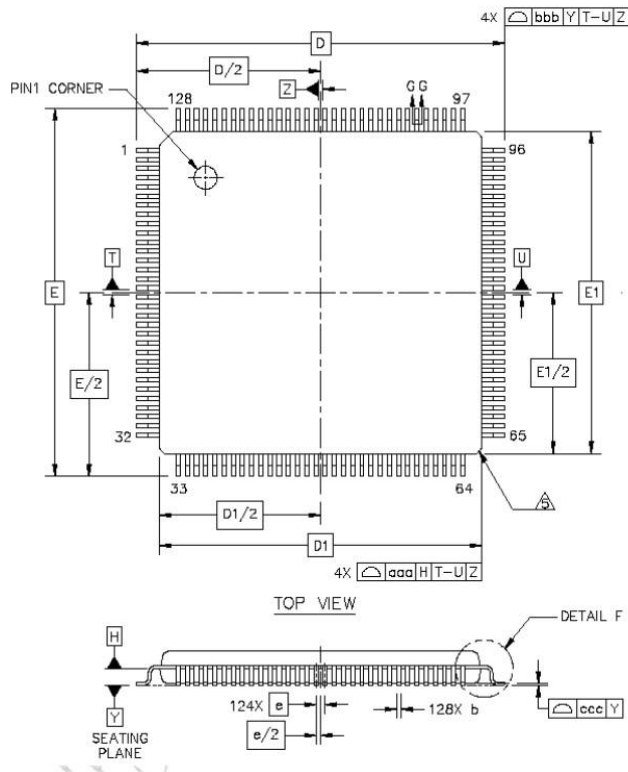

	SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS	A	----	----	1.6
STAND OFF	A1	0.05	----	0.15
MOLD THICKNESS	A2	1.35	1.4	1.45
LEAD WIDTH(PLATING)	b	0.13	0.18	0.23
LEAD WIDTH	b1	0.13	----	0.19
L/F THICKNESS(PLATING)	c	0.09	----	0.2
L/F THICKNESS	c1	0.09	----	0.16
	X	D	16 BSC	
	Y	E	16 BSC	
BODY SIZE	X	D1	14 BSC	
	Y	E1	14 BSC	
EP SIZE	X	M	5.0	5.1
	Y	N	5.0	5.1
LEAD PITCH	e		0.4 BSC	
	L	0.45	0.6	0.75
	L1		1 REF	
FOOTPRINT	<b>θ</b>	0°	3.5°	7°
	<b>θ1</b>	0°	----	----
	<b>θ2</b>	11°	12°	13°
	<b>θ3</b>	11°	12°	13°
	R1	0.08	----	----
	R2	0.08	----	0.2
	S	0.2	----	----
PACKAGE EDGE TOLERANCE	aaa		0.2	
LEAD EDGE TOLERANCE	bbb		0.2	
COPLANARITY	ccc		0.08	
LEAD OFFSET	ddd		0.07	
MOLD FLATNESS	eee		0.05	

For PCB design, please use the device packaging and reference design provided by DWIN Technology.

• **Basic performance parameters**

Parameter	U	Minimum	Typical	Maximum	Instructions
CPU core voltage	V	1.10	1.20	1.30	T5L2
	V	1.20	1.25	1.35	T5L1
CPU core current	m A		100		Dual-core 200MHz full speed
IO voltage (VIO)	V	1.8	3.3	3.6	5V TTL/CMOS level input requires voltage divider or
AD operating voltage(VADD)	V	1.8	3.3	3.6	
AD reference voltage (Vref)	V			VADD+0.3	
AD input voltage	V			Vref+0.3	
IO high level output amplitude(VOH)	V	3.0			VIO=3.3V,IO load current 8mA
IO low level output amplitude(Vol)	V			0.3	VIO=3.3V,IO load current 8mA
IO high level output current	m	-10			VIO=3.3V,VOH=3V
IO low level output current	m	10			VIO=3.3V,VOL=0.3V

IO port turnover speed	M		100		
IO high level recognition voltage(VIH)	V	1.6			
IO low level recognition voltage(VIL)	V			0.6	
External crystal frequency	M	10.0	11.0592	12.0	
CPU main frequency (CPU_CLK)	M Hz		206.4384		Corresponding to 11.0592MHz crystal, CPU main frequency = crystal frequency* 56/3. 350MHz version of the code
Working temperature	°C	-40		+85	
Storage temperature	°C	-55		+105	
ESD protection capability	K		2		HBM

## • Notices for Hardware Design

- (1) The core power voltage must be stable, otherwise it will lead to abnormal CPU operation.
- (2) Reset is recommended to use low-level reset IC processing such as SGM809S instead of simple RC reset circuit. Each T5L CPU core has a built-in watchdog(WDT) , doesn't need external WDT IC.
- (3) Four layer PCB application design is recommended to achieve excellent EMC characteristics. When designing in a dual panel application, please as close as possible to the IC power supply pin to connect the 470pF in parallel with 104 (or 105) for capacitor filtering and reduce noise emissions.
- (4) When IO input signal is over 0.3V of VIO voltage, IO must be protected by voltage divider or clamp, otherwise it may cause abnormal signal or damage IC.
- (5) All IO ports are floating input when they are configured as input mode, without internal pull-up or pull-down. All IO ports are in the input state during the reset process. If they are output, they can be pulled down or pulled up externally to ensure that the reset process has a definite level.
- (6) The 4-bit bus speed of T5L and external SPI Flash is 100MHz, thus the wiring should be as close as possible, and capacitor filtering of 470pF parallel 105 must be arranged on the power pin of SPI Flash.

## (6) OS CPU Description

The T5L OS CPU adopt the 8051 kernel, which is the most widely used in industry and has the longest time in mass production. On the basis of keeping 8051 real-time, fast IO speed, stability and reliability, DWIN has greatly improved 8051 memory access and calculation capability by optimizing code processing, expanding SFR bus and adding hardware mathematical processor.

Users can also let OS CPU run DWIN OS platform for secondary application development on DWIN OS platform. For specific development methods, please refer to "DWIN OS program development guide based on T5L CPU".

### • Initial Configuration

When the 8051 kernel is powered on, the special function register (SFR) in the following table must be initialized correctly.

SFR name	Address	Initial configuration values	Instructions
CKON	0X8	0X00	CPU runs in 1T mode
T2CON	0XC8	0X70	Configure extended interrupt system, configure timer T2 to run in Autoload
DPC	0X93	0X00 or 0x01	After the operation of MOVX instruction, how DPTR's changed. It must be configured as 0x00 when process is developed in C51. 0x00:unchanged. 0x01:DPTR=DPTR+1. 0X03:DPTR=DPTR-1.
PAGESEL	0X9	0X01	64KB code space
D_PAGESEL	0X9	0X02	32KB RAM space accessed by MOVX, address 0x8000-0xFFFF
MUX_SEL	0XC9	0x60 or configuration according to application needs	Peripheral multiplexing selection: .7 1 = CAN interface leads to P0.2, P0.3, 0 = CAN interface does not lead out, it is IO interface; .6 1 = UART2 interface leads to P0.4, P0.5, 0 = UART2 interface does not lead out, it is IO interface; .5 1 = UART3 interface leads to P 0.6, P 0.7, 0 = UART3 interface does not lead out, it is IO interface; .4-2 retain; .1 WDT control 1=open 0=close;

			.0 WDT feed dog, 1=feed the dog one time(The WDT count becomes zero, and the watchdog's overflowing time is one second. );
PORTDRV	0XF9	0x01 or configuration according to application	Driver capability configuration of IO port output mode,0x00=4mA 0X01=8mA 0X02=16mA 0X03=32mA
RAMMODE	0XF	0X00	DGUS variable memory access interface control

## • Memory

The 8051 kernel of OS can access seven different kinds of memory, which are shown in the table below.

Memory type	Size	Address space	Access mode
Code memory	64KBytes	0x0000-0xFFFF	It can only be read by MOVC instruction, which is same as standard 8051.
Data register	256KBy	0x00-0xFF	The same as standard 8051
SFR register	128KBytes	0X80-0XFF	The same as standard 8051, DWIN can provide user SFR definition files( .INC or .H header file).
Extended SFR register	64KBytes	0x00-0x3F	Access with the SFR register interface defined by EXADR and
Data memory	32KBytes	0x8000-0xFFFF	Using MOVX instruction to access. When DPC is configured as 0x00, it is same as standard 8051.
DGUS variable	256KBy	0x00:0000-	Access using DGUS variable memory interface.
CAN Communication interface	48KBytes	0xFF:0060-0xFF:006B	Access using DGUS variable memory interface.

## • Code memory(64KBytes)

Functional partitioning and definition of the code memory space are shown in the following table.

Addre	Definition	Instructions
0x00	Reset_PC	After reset, the program starts running address .
0x00	EX0_ISR_PC	External interrupt 0 program interface
0x00	T0_ISR_PC	Timer0 interrupt program interface
0x00	EX1_ISR_PC	External interrupt 1 program interface
0x00	T1_ISR_PC	Timer1 interrupt program interface
0x00	UART2_ISR_PC	UART2 TX/RX interrupt program interface
0x00	T2_ISR_PC	Timer2 interrupt program interface
0x00	CAN_ISR_PC	CAN interface interrupt program interface
0x00	UART4_TX_ISR_PC	UART4 TX interrupt program interface
0x00	UART4_RX_ISR_PC	UART4 RX interrupt program interface
0x00	UART5_TX_ISR_PC	UART5 TX interrupt program interface

0x00	UART5_RX_ISR_PC	UART5 RX interrupt program interface
0x00	UART3_ISR_PC	UART3 TX/RX interrupt program interface
0x00 F8	JTAG interface enabled	0xFFFF will allow connection to JTAG interface for simulation debugging, and other values will be prohibited.
0x00	"DWINT5"	Code identification, illegal values will cause OS 8051 to stop running.
0x01	Application code start	Maximum 63.75KB

The OS 8051 code is stored in the 0x01:0000-0x01:FFFF position of the 1Mbytes on chip Flash. After power-on reset, the system loads and runs in RAM. Code can only be written to on-chip Flash through SD interface or UART1 interface (or WIFI network interface).

### • **DGUS Variable Memory(256KBytes)**

The bit width of DGUS variable memory is 32 bits, and each address corresponds to 4Bytes data, in which:

(1)Address from 0x00:0000 to 0x00:7FFF , corresponding to 128Kbytes variable memory space, are currently used by DGUSII system.

For example, 0x1000 and 0x1001 DGUSII variable memory correspond to 0x800 address of OS 8051 DGUS variable memory. D3 corresponds to 0x1000 variable high byte, D2 corresponds to 0x1000 variable low byte, D1 corresponds to 0x1001 variable high byte, D0 corresponds to 0x1001 variable low byte.

(2)Address from 0x00:8000to 0x00:0800 are not currently in use. Users can define themselves as variable memory to use.

(3)Address from 0xFF:0060 to 0xFF:006B address, are CAN communication interface configuration and transceiver buffer.

Accessing DGUS variable memory uses the SFR register interface of the table below.

SFR	Addre	Instruction
RAMMO DE	0xF8	The interface control of DGUS variable memory access, which is Bit Addressable. .7 Write 1 to occupy DGUS variable memory for reading and writing, and must be cleared when not occupied; .6 APP_EN Write 1 to start reading and writing once, and it is cleared after hardware execution; .5 APP_RW 1= read variable memory 0= write variable memory; .4 APP_ACK hardware pair 8051 occupies the variable memory request, 1 = OK, 0 = BUSY, need to continue to wait; .3-.0 Corresponding Data3:DATA0 Writing Enables 1=corresponding Byte is written 0=corresponding Byte is not written;
ADR_H	0XF	DGUS variable memory high 8-bit address,A23:A16.
ADR_M	0XF	DGUS variable memory middle 8-bit address,A15:A8.

ADR_L	0XF	DGUS variable memory low 8-bit address,A7:A0.
ADR_INC	0xF4	The increment of address automatically increases after reading and writing of DGUS variable memory, that is after reading and writing ADR_H:M:L=before reading and writing ADR_H:M:L+ADR_INC.
DATA3	0xF	DGUS variable data interface,write selection corresponds to RAMMODE.3.
DATA2	0XF	DGUS variable data interface,write selection corresponds to RAMMODE.2.
DATA1	0XF	DGUS variable data interface,write selection corresponds to RAMMODE.1.
DATA0	0XF	DGUS variable data interface,write selection corresponds to RAMMODE.0.

DGUS variable memory must be read and written according to the following process(If you want to use interrupt in the application, the interrupt must be closed when the main application reads and writes DGUS variable data, not nested.)

(2) Configured address and address increment;

(3) Set RAMMODE as 0x8F (write) or 0xAF (read), check if RAMMODE. 4=1 confirms access to read and write control.

(4) Read and write data, set RAMMODE as 0X00 after reading and writing.

Examples of application:Read and write two double words in 0x0800 address (corresponding to DGUSII variable memory address 0x1000).

```

MOV    ADR_H,#00H        ;Configure DGUS variable memory address
MOV    ADR_M,#08H
MOV    ADR_L,#00H
MOV    ADR_INC,#01H      ;Configuration address increment
MOV    RAMMODE,#0AFH    ;Start read mode
JNB    APP_ACK,$        ;Waiting for confirmation
MOV    R0,#TEST_BUF     ;Demonstration reading
MOV    R1,#2
RDVP:  SETB  APP_EN      ;Start reading data once
      JB   APP_EN,$
      MOV  @R0,DATA3
      INC  R0
      MOV  @R0,DATA2
      INC  R0
      MOV  @R0,DATA1
      INC  R0

```

```

MOV    @R0,DATA0
INC    R0
    DJNZ    R1,RDVP
CLR    APP_RW    ;Writing mode, demo writing
MOV    ADR_L,#00H    ;Adjust the address to 0x08:0000
MOV    R0,#TEST_BUF
MOV    R1,#2

```

```

WRVP: MOV
    DATA3,@R0 INCR0
MOV    DATA2,@R0
INC    R0
MOV    DATA1,@R0
INC    R0
MOV    DATA0,@R0
SETB   APP_EN    ;Start writing data once
JNB    APP_EN,$
INC    R0
DJNZ   R1,WRVP
MOV    RAMMODE, #00H    ;Variable memory read and write ends

```

## • Data Memory(32KBytes)

OS 8051 CPU Of T5L has 32KBytes RAM as data storage, corresponding address from 0x8000 to 0xFFFF, related interface SFR are as follows.

SFR	Address	Instruction
DPC	0x93	After using DPTP MOVX instruction operation, DPTR change mode: DPC=0X00:DPTR remains unchanged after operation of MOVX instructions. If developed using C51, DPTR must be configured as 0x00 DPC=0X01 After MOVX instruction operation,DPTR=DPTR+1 DPC=0X03 After MOVX instruction operation,DPTR=DPTR-1
DPH	0X83	DPTR data pointer
DPL	0X82	

The address space from 0x0000 to 0x7FFF prohibit using MOVX instructions to read and write, which may cause code to run abnormally.

T5L MOVX instruction takes three instruction cycles (14.5nS in 3T, 11.0592MHz crystal), and DPC can configure DPTR automatic incremental (or decrement) mode, which makes T5L read-write data memory much faster than standard 8051, especially for reverse storage read-write applications.

Examples of application :

```
MOV    DPC,#01H    ;DPTR++
MOV    DPTR,#8000
MOV    A,@DPTR    ;A=@8000
MOV    A,@DPTR    ;A=@8001,After
```

## • Extended SFR register

Extended SFR registers use EXADR, EXDDATA register to read and write.

SFR	Addre	Instruction
EXAD	0xFE	Extend the SFR address and automatically add 1 to the next SFR after each reading and writing.
EXDA	0xFF	Expanding SFR data interface

The extended SFR register defines the register interface of the Mathematical Operating Unit (MDU) and provides 48 additional data storage for users. The following table is defined:

EXADR	Definition	Instruction
0x00	MDU_A7	Maximum bit of MDU A register(64bit)
.....		
0x07	MDU_A0	Minimum bit of MDU A register(64bit)
0x08	MDU_B7	Maximum bit of MDU B register(64bit)
.....		
0x0F	MDU_B0	Minimum bit of MDU B register(64bit)
0x10	MDU_C7	Maximum bit of MDU C register(64bit)
.....		
0x17	MDU_C0	Minimum bit of MDU C register(64bit)
0x18	EXR0	First extended data register.
0x19	EXR1	Second extended data register
0x3F	EXR39	Fortieth extended data register



If read-write extension SFR is needed in interrupt application, the main program must shutdown interrupt when read-write extension SFR, and can not be nested.

### 3.8 Mathematical operating unit(MDU)

Due to the limited computing power of 8051, the hardware mathematic unit (MDU) is extended in T5L to improve computing power. OS 8051 applications can access hardware MAC and hardware divider. The related SFR definitions are as follows:

SFR name	Addr	Instruction
MAC_CN	0xE5	<p>The MAC hardware multiplier-adder control register is defined as follows:</p> <p>.7 MAC enabled, write 1 to perform a calculation, becomes zero after hardware treatment;</p> <p>.6 MAC mode, 1 is multiplier-adder mode: <math>C=A*B+C</math>, 0 is multiplier mode: <math>C=A*B</math>;</p> <p>.5 Write 0;</p> <p>.4 1=64bit MAC 0=32bit MAC(A3:0/B3:0/C7:0, note that C is still 64bit);</p> <p>.3 1 = Signed number, 0 = Unsigned number;</p> <p>.2-.0 Write 0;</p> <p>The A、B、C register group is the MDU_A, MDU_B, MDU_C register group of extended SFR registers.</p>
DIV_CN	0XE6	<p>DIV hardware divider control register (division C/A, quotient A, remainder B) is defined as follows:</p> <p>.7 DIV enabled write 1 to perform a calculation and the hardware to perform zero clearance;</p> <p>.6 DIV mode 1: Rounded 0: Not rounded;</p> <p>.5-.4 Undefined, write 0;</p> <p>.3 1 = Signed number 0 = unsigned number;</p> <p>.2-.0 Write 0;</p> <p>The A、B、C register group is the MDU_A, MDU_B, MDU_C register group of extended SFR registers.</p>

Examples of application: 32bit MAC calculate  $0x1234*0x5678-0x2000$

```

MOV    EXADR,#04H    ;write A3:A0=0x 00 00 12
MOV    EXDATA,#00
MOV    EXDATA,#00
MOV    EXDATA,#12
MOV    EXADR,#34H    ;write B3:B0=0x 00 00 56
MOV    EXDATA,#00
MOV    EXDATA,#00
MOV    EXDATA,#56

```

```

MOV    EXDATA,#78H
MOV    EXADR,#10H    ;write C7:C0=0xFF FF FF FF FF FF E0 00 (-0x2000)
MOV    EXDATA,#0FFH
MOV    EXDATA,#0FFH
MOV    EXDATA,#0FFH
MOV    EXDATA,#0FFH
MOV    EXDATA,#0FFH
MOV    EXDATA,#0FFH
MOV    EXDATA,#0FFH
MOV    EXDATA,#0E0H
MOV    EXDATA,#00H
MOV    MAC_CN,#0C8H  ;32bit integer MAC
WTMAC: MOV    A,MAC_CN
        JB    ACC,7,WTMAC
MOV    EXADR,#10H    ;read results00 00 00 00 06 25 E0 60
MOV    R7,EXDATA
MOV    R6,EXDATA
MOV    R5,EXDATA
MOV    R4,EXDATA
MOV    R3,EXDATA
MOV    R2,EXDATA
MOV    R1,EXDATA
MOV    R0,EXDATA

```

### 3.9 Timer

T5L OS 8051 has three timers T0/T1/T2, of which T0/T1 is consistent with standard 8051, and T2 can only work in 16 bit Autoload mode. The clocks of T0 and T1 are 1/12 of the CPU main frequency. The clocks of T2 can be configured as 1/12 or 1/24 of the CPU main frequency.

Relevant SFR are shown in the table below.

SFR	Address	Instructions
TCON	0x88	T0, T1 control registers, same as standard 8051, can be addressable by bit .7=TF1 .6=TR1 .5=TF0 .4=TR0 .3=IE1 .1=IE0 .0=ITO IT1 and IT0 are external interrupt trigger mode selection: 0 = low level trigger 1 = down-jump edge trigger.
TMOD	0x89	T0, T1 mode selection, same as standard 8051.
TH0	0x8C	
TL0	0x8A	
TH1	0x8D	
TL1	0x8B	
T2CON	0xC8	The T2 control register can be addressable by bit. .7:Clock frequency division selection,0=CPU Main frequency /12, 1=CPU Main frequency /24; .6-4:must write 1; .3-1:must write 0; .0:TR2,1=T2 run 0=T2 close;
TH2	0xCD	T2 running value, automatically loaded every time counting overflow
TL2	0xCC	TH2=CRCH TL2=CRCL.
TRL2H	0xCB	The reload value of T2 = 65536-T2 timer interval (uS)*T2 clock frequency (MHz). CPU main frequency = crystal frequency * 56/3, corresponding CPU main frequency /
TRL2L	0xCA	12 = crystal frequency * 14/9, CPU main frequency / 24 = crystal frequency * 7/9. For example, the CPU main frequency is 206.438 MHz, T2 chooses 1/12 frequency division,

The relevant settings of timer interrupt are as follows:

Interrupt type	Program entry address	Trigger marker	Interrupt enabling	Remarks
T0	0x000B	TF0(TCON.	IEN0.1	Automatic clearing of TF0 in interrupt
T1	0x001B	TF1(TCON.	IEN0.3	Automatic clearing of TF0 in interrupt
T2 interruption	0x002B	TF2(TCON. 6)	IEN0.5	After interrupt response, TF2 needs to be cleared by software, otherwise interrupt will be

Examples of application: In 11.0592 MHz crystal (corresponding to the main frequency of CPU 206.4384 MHz), T2 1mS interruption is set to output 500 Hz square wave at P 1.0.

```
ORG    002BH          ;T2 interrupt program
LJM    T21NT
```

```
T21NT: CLR    TF2          ;T2 interrupt
        program CPL      P1.0
```

**RETI**

```

;initialization of T2-related SFR
MOV  CRCH,#HIGH(48333)      ;1mS timer
MO   CRCL,#LOW(48333)
MO   T2CON,#71H            ;TR2=1
OR   IEN0,#20H             ;ET2=1  turn on T2

```

**3.10 Watchdog Timer(WDT)**

In order to monitor the operation of the software and ensure that the system automatically returns to normal when operation becomes abnormal, T5L OS 8051 is equipped with a software watchdog (WDT) timer whose counting reset time is set to 1 second (corresponding to 11.0592 MHz crystal). Once the WDT is turned on, the software needs to feed the dog in the counting reset time, otherwise a system reset will occur. Reset has no effect on the contents of 32KB data memory and 0x008000-0x00FFFF space 128KB DGUS variable memory.

The relevant reference codes for WDT operations are as follows:

```

ORL   MUX_SEL,#02H        ;open WDT
ANL   MUX_SEL,#0FDH      ;close WDT
ORL   MUX_SEL,#01H       ;WDT reset (feeding

```

**3.11 IO**

T5L OS 8051 has three 8 bit parallel ports(P0-P2) and a 4 bit parallel port(P3.0-P3.3), a total of 28 IO ports. P0-P0.7 of P0 port is multiplexed with UART and CAN interface, and multiplexing function or IO function can be selected through MUX\_SEL register.

The input of all IO ports is always open, the input is floating, and there is no internal pull-up or pull-down. When IO port is used as output, it is necessary to open the output control, and the output driving ability can also be configured.

Because the IO interface of power-on reset process is input mode, when used as output, it must be pulled up or pulled down externally to ensure that the reliable output of power-on process is ensured, and will not malfunction due to IO floating.

P3.0 is external interrupt 0, and P3.1 is external interrupt 1 input. It can be configured as low level trigger (0) or jump down edge trigger (1) through IT0 and IT1.

In addition to the need to control the output switch, output strength and peripheral multiplexing power-on initialization configuration, the subsequent use of IO is consistent with the standard 8051.

IO-related SFR are shown in the following table:

SFR	Address	Instructions
P0	0x80	Addressable by bit, same as standard 8051
P1	0x90	Addressable by bit, same as standard 8051
P2	0xA0	Addressable by bit, same as standard 8051
P3	0xB0	It can be addressable by bit, the same as standard 8051, only P3.0-P3.3 is valid.
POMDO UT	0xB7	P0 Interface Output Configuration: .7 0=P0.7Output shutdown 1=P0.7Output Open (push-pull output); .6 0=P0.6Output shutdown 1=P0.6Output Open (push-pull output ); .5 0=P0.5Output shutdown 1=P0.5Output Open (push-pull output ); .4 0=P0.4Output shutdown 1=P0.4Output Open (push-pull output); .3 0=P0.3Output shutdown 1=P0.3Output Open (push-pull output); .2 0=P0.2Output shutdown 1=P0.2Output Open (push-pull output); .1 0=P0.1Output shutdown 1=P0.1Output Open (push-pull output); .0 0=P0.0Output shutdown 1=P0.0Output Open (push-pull output);
P1MDO	0xBC	P1 interface output configuration
P2MDO	0xBD	P2 interface output configuration
P3MDO	0xBE	P3 interface output configuration
MUX_ SEL	0xC9	Selection of peripheral reuse: .7 1 = CAN interface leads to P 0.2 and P 0.3,0 = CAN interface is not introduced, it is IO interface. .6 1 = UART2 interface leads to P 0.4 and P 0.5,0 = UART2 interface is not introduced, it is IO interface; .5 1 = UART3 interface leads to P 0.6 and P 0.7,0 = UART3 interface is not introduced, it is IO interface; .4-.2 Retain; .1 WDT control, 1=open 0=close; .0 WDT feed dog, 1=feed the dog one time(The WDT count becomes zero, and the watchdog's overflowing time is one second. );
PORTDR V	0xF9	Driver capability configuration of IO port output mode, 0x00 = 4mA 0x01=8mA(recommended)

The relevant settings of external interrupt of IO port are as follows:

Interrupt type	Program entry	Trigger marker	Interrupt enabling control	Remarks
----------------	---------------	----------------	----------------------------	---------

EX0 interrupt	0x0003	IE0(TCON .1)	IEN0.0	IE0 is cleared automatically when interrupt response, corresponding to P3.0. IT0 (TCON.0) = 0 low level trigger interrupt, IT0 = 1 jump down edge trigger interrupt.
EX1 interrupt	0x0013	IE1(TCON .3)	IEN0.2	IE1 is cleared automatically when interrupt response, corresponding to P3.1. IT1 (TCON.2) = low level trigger interrupt, IT1 = 1 jump down

## 3.12 UART communication interface

### 3.12.1 UART2 interface

UART2 related SFR are shown in the following table.

SFR	Addre	Instructions
MUX_SEL	0xC9	.6 1 = UART2 interface leads to P 0.4 and P 0.5, 0 = UART02 interface does not lead out, it is IO port .
SCON	0x98	UART2 control interface, the same as standard 8051, can be addressable by bit. .7=SM0 .6=SM1 .5=SM2(multiprocessor communication bit) .4=REN0 .3=TB80 .2=RB80 .1=TI0 .0=RI0.
SBUF	0x99	UART2 transceiver data interface
ADCO	0xD	Baud rate generator selection, 0x00 = T1 timer (standard 8051), 0x80 = SRELOH:L.
PCON	0x87	.7 = SMOD baud rate frequency doubling selection, 0 = no frequency doubling, 1 = frequency doubling.
SRELO	0xB	When ADCON = 0x80, SRELOH:L is used to set the baud rate without taking up
SRELOL	0xA	T1. SMOD=0 SRELOH:L=1024-CPU main frequency/(64*baud rate ) SMOD=1 SRELOH:L=1024-CPU main frequency/(32*baud rate ) CPU main frequency = crystal frequency * 56/3, 11.0592 MHz crystal corresponds to 206.4384 MHz main frequency.

The relevant settings for UART2 interruption are as follows:

Interrupt type	Program entry address	Trigger marker	Interrupt enabling control	Remarks
UART 2	0x0023	RIO(SCON.0)	IEN0.4	After interruption processing, software needs to clear

### 3.12.2 UART3 interface

UART3 related SFR are shown in the following table.

SFR	Addre	Instructions
-----	-------	--------------

MUX_S	0xC	.5 1 = UART3 interface leads to P 0.6, P 0.7, 0 = UART3 interface does not lead out, it is IO port.
SCON1	0x9B	UART3 control interface, it is not addressable by bit. .7 0=9bit UART, 1=8bit UART; .6 Undefined; .5=SM2(multiprocessor communication bit ) .4=REN .3=TB8 .2=RB8 .1=TI .0=RI. Clearing the SCON1 bit tag requires two consecutive writings, such as ANL SCON1,#0FEH ANL SCON1,#0FEH
SBUF	0x9	UART3 transceiver data interface
SREL1	0xB	UART3 baud rate setting (CPU main frequency = crystal frequency * 56/3, 11.0592
SREL1L	0x9D	crystal corresponding to 206.4384 MHz main frequency): SRE1H:L=1024-CPU main frequency/(32*baud rate)

The relevant settings for UART3 interruption are as follows:

Interrupt type	Program entry address	Trigger marker	Interrupt enabling control	Remarks
UART3 interrupt	0x0083	SCON1.0, SC	IEN2.0	After interruption processing, software needs to clear the interruption trigger mark.

### 3.12.3 UART4 interface

UART4 related SFR are shown in the following table.

SFR name	Addr	Instructions
SCON2T	0x96	UART4 transmission control: .7 UART4 sending enables,0=close,1=open; .6 0=8bit Mode,1=9bit Mode; .5 TB8, 9 <sup>th</sup> bit sent in 9bit mode; .4-1 Write0; .0 TI, send flag, the position at which the stop bit is sent.
SCON2R	0x97	UART4 receive control: .7 UART4 sending enables,0=close,1=open; .6 Write0; .5 TB8, 9 <sup>th</sup> bit sent in 9bit mode; .4-1 Write0; .0 R RI, receive tag, set when the stop bit is received when a valid stop bit is received.
SBUF2_T	0x9	UART4 sending data interface
SBUF3_R	0x9	UART4 receiving data interface
BODE2_DIV	0X	UART4 baud rate setting
BODE2_DIV	0X	BODE2_DIV_H:L=CPU main frequency/(8*baud rate)

The relevant settings of UART4 interruption are as follows:

Interrupt type	Program entry address	Trigger	Interrupt enabling	Remarks
UART4 send interrupt	0x0053	SCON2 T.0	IEN1.2	After interruption processing, software needs to clear the
UART4 receive	0x005B	SCON2 R.0	IEN1.3	After interruption processing, software needs to clear the

### 3.12.4 UART5 interface

The relevant settings of UART5 are as follows:

SFR name	Address	Instructions
SCON3T	0xA7	UART5 transmission control: .7 UART5 sending enables,0=close,1=open; .6 0=8bit Mode,1=9bit Mode; .5 TB8, 9 <sup>th</sup> bit sent in 9bit mode; .4-.1 Write0; .0 TI, send flag, set when the stop bit is received when a valid stop bit is received.
SCON3R	0xAB	UART5 receive control: .7 UART5 sending enables,0=close,1=open; .6 Write0; .5 TB8, 9 <sup>th</sup> bit sent in 9bit mode; .4-.1 Write0; .0 R RI, receive tag, set when the stop bit is received when a valid stop bit is received.
SBUF3_TX	0xAC	UART5 sending data interface
SBUF4_RX	0xAD	UART5 receiving data interface
BODE3_DIV_H	0xAE	UART5 baud rate setting
BODE3_DIV_L	0xAF	BODE3_DIV_H:L=CPU main frequency/(8*baud rate)

The relevant settings of UART5 interruption are as follows:

Interrupt type	Program entry address	Trigger	Interrupt enabling	Remarks
UART5 send interrupt	0x0063	SCON3 T.0	IEN1.4	After interruption processing, software needs to clear the
UART5 receive	0x006B	SCON3 R.0	IEN1.5	After interruption processing, software needs to clear the

## 3.3 CAN communication interface

The SFR associated with the CAN interface are shown in the following table :



SFR	Addr	Instructions
MUX_S	0xC	.7 1 = CAN interface leads to P 0.4 and P 0.5, 0 = CAN interface does not lead out, it is IO port.
CAN_CR	0x8F	CAN Interface Control Register: .7 CAN interface enabled, 1=open 0=close; .6 CAN interface mode, 1=software reset 0=working normally; .5 Write 1 to configure the configuration data of CAN interface once (0xFF:0060-0xFF:0062), and cleaned up after hardware processing; .4 Set speed mode, 1 = 1 Sampling 0 = 3 Sampling; .3 Setting filter mode, 1=double 0=single; .2 Write 1 starts sending once, and the hardware processing (sending success, arbitration failure, EI (CAN_IR.3) occurred, software reset) clears up; .1-0 Undefined, write 0.
CAN_IR	0x91	CAN Interface Interrupt Status Register .7 RF_IF, remote frame receiving interrupt flag, hardware configuration, software clearance is required; .6 CAN_RX_IF, CAN receives interrupt markers, hardware placement, software clearance is required. During the placement period, the hardware can no longer update the data; .5 CAN_TX_IF, CAN sends a successful interrupt marker, hardware placement, software clearance is required; .4 OI, receiving overflow markers, hardware blanking, software clearance is required; .3 EI, error marker, CAN_ET [4:0] has an error when the bit is raised and software clearance is required; .2 JI, send arbitration mark, 1 = send arbitration failure, 0 = send arbitration success; .1-0 Undefined.
CAN_ET	0xE8	CAN interface error type register, hardware blanking, need software zeroing. Addressable by bit. .7 Node suspension identification; .6 Active error identification; .5 Passive error identification; .4 CRC Check error identification; .3 Response error identification; .2 Format error identification; .1 Bit filling error identification; .0 Bit error identification.

The CAN communication interface is defined in terms of DGUS variable space. The related variables are defined in the following table:

Address	Positi	Leng	Definiti	Instructions
0xFF:0060	D3	1	BRP	BRP: Baud rate frequency divider register BTR0: [7:5] is the synchronous jump width sjw, [3:0] prop propagation time T0. [7:4] is phase buffer segment 1, T1, [3:0] is phase buffer segment 2, T2. $T0+T1+T2=CPU \text{ main frequency}/(\text{baud rate}*(BRP*2+1))-4$
	D2	1	BTR0	
	D1	1	BTR1	
	D0	1	Undefined,	
0xFF:00	D3:	4	ACR3:	Acceptance code register

0xFF:00	D3:	4	AMR3:	Acceptance code register
0xFF:00 63	D3	1	RXER	Receiving error count register
	D2	1	TXER	Sending error count register
	D1:	2	Undefin	Write 0
0xFF:00 64	D3	1	CAN_T X_	[7]IDE,[6]RTR,[3:0]—DLC, frame data length
	D2:	3	Undefin	
0xFF:00 65			ID	ID, 29bit is valid when expanding frames, 11bit is valid for standard frames.
	D3	1		ID, first byte, standard frame and extended frame.
	D2	1		ID, the second byte, [7:5] is 3bit of the standard frame, and the second byte of the
	D1	1		ID, third byte, invalid standard frame, third byte of extended frame.
	D0	1		ID, fourth byte, invalid standard frame, [7:3] extended frame height 5 bit.
0xFF:00	D3:	4	Data	Send data,DATA1-DATA4
0xFF:00	D3:	4	Data	Send data,DATA5-DATA8
0xFF:00 68	D3	1	CAN_R X_	[7]IDE,[6]RTR,[3:0]—DLC, frame data length
	D2:	3	Undefin	
0xFF:00 69			ID	ID, 29bit is valid when expanding frames, 11bit is valid for standard frames.
	D3	1		ID, first byte, standard frame and extended frame.
	D2	1		ID, the second byte, [7:5] standard frame height 3 bit, and the second byte of the extended frame.
	D1	1		ID, third byte, invalid standard frame, third byte of extended frame.
	D0	1		ID, fourth byte, invalid standard frame, [7:3] extended frame height 5 bit.
0xFF:00 6	D3: D0	4	Data	Receive data,DATA1-DATA4
0xFF:00 6	D3: D0	4	Data	Receive data,DATA5-DATA8

The relevant settings of CAN interface interruption are as follows:

Interrupt type	Program entry address	Trigger marker	Interrupt enabling control	Remarks
interface interruption	0x004B	CAN_IR	IEN1.1	After interruption processing, software needs to clear the interruption trigger mark.

## 3.4 Interrupt system

### 3.4.1 Interrupt control SFR

T5L OS CPU has 12 interrupts. The related control SFR list is as follows:

SFR	Address	Instructions
IEN0	0xA8	The interrupt enable controller 0 can be addressed by bit. .7 Interrupt master control bit;0=all interrupts closed 1=Whether an interrupt is opened is controlled by the control bit of each interrupt; .6 Must write 0; .5 ET2 T2 timer interrupt enable control bit; .4 ES0 USRT2 interrupt enable control bit; .3 ET1 T1 timer interrupt enable control bit; .2 EX1 external interrupt 1 (P3.1 pin) interrupt enabling control bit; .1 ET0 T0 timer interrupt enable control bit; .0 EX0 external interrupt 1 (P3.0 pin) interrupt enabling control bit.
IEN1	0xB8	The interrupt enable controller 1 can be addressed by bit. .7-.6 Must write 0; .5 ES3R UART5 receiving interrupt enabled control bit; .4 ES3T UART5 receiving interrupt enabled control bit; .3 ES2R UART4 receiving interrupt enabled control bit; .2 ES2T UART4 receiving interrupt enabled control bit; .1 ECAN CAN communication interrupt enabling control bit; .0 Must write 0.
IEN2	0x9A	Interrupt enabling controller 2 .7-.1 Must write 0 .0 ESI USRT3 interrupt enabling control bit
IEN3	0xD	Interrupt enabling controller 3, must write 0x00
IP0	0xA	Interrupt priority controller 0
IP1	0xB	Interrupt priority controller 1

### 3.4.2 Interrupt priority

The interrupt priority of T5L OS CPU is handled according to the following rules:

(1) Twelve interrupts are divided into six groups with two interrupts in each group. The priority in the same group is fixed. For example, the priority of interrupt 0 is higher than that of UART3, as shown in the table below.

Groupin	IP0	IP1	Interrupt correspondence
---------	-----	-----	--------------------------

			High priority	Low priority
G0	.0	.0	External interrupt	UART3 interruption
G1	.1	.1	T0 timer interrupt	CAN communication interruption
G2	.2	.2	External interrupt	UART4 send interrupt
G3	.3	.3	T1 timer interrupt	UART4 receiving interruption
G4	.4	.4	UART2 interrupt	UART5 send interrupt
G5	.5	.5	T2 timer interrupt	UART5 receiving interruption

(1) There are four levels of priority among the six groups, which can be configured by the corresponding bits of IP0 and IP1 according to the table below.

Inter group priority	IP1 counterpart	IP0 counterpart
3(highest)	1	1
2	1	0
1	0	1
0(minimum)	0	0

For example, to set the G2 group's T2 timer interrupt and UART5 receive interrupt priority to the highest, you can set IP1=0x20, IP0=0x20.

(2) If the configurations have the same priority (IP1 = 0x00 IP0 = 0x00), the G0 group has the highest priority and the G5 group has the lowest priority. The interrupt priority weights with the same configuration are as follows:

Weig	11	10	9	8	7	6	5	4	3	2	1	0
Priori	Maxim											Minimu
Interr	EX0	UAR	E	CA	EX	UART4-	ET	UART4-	UAR	UART5-	ET	UART5-

(3) High priority interrupts can be nested in low priority interrupts (i.e. interrupts with small weights can be interrupted by interrupts with large weights), and at most four levels can be nested.

Special Notice:

T5L OS CPU is fast (1 uS can execute 130-150 instructions on average). Interrupt execution time is short and real-time is very high. It is not recommended that users use interrupt nesting to cause complex program architecture. Interrupt is closed directly at the execution of each interrupt service program (EA = 0), and interrupt is opened again at exit of program (EA = 1).

### 3.10 8051 Instruction set of T5LASIC

Instruction format	Instruction	Instruction	Instruction format	Instruction	Instruction
ADD/ADDDC A,Rn	1	1	MOV @Ri,direct	2	2
ADD/ADDDC A,direct	2	2	MOV @Ri,#data	2	2
ADD/ADDDC A,@Ri	1	2	MOV	3	3
ADD/ADDDC A,@data	2	2	MOVC	1	3
SUBB A,Rn	1	1	MOVC A,@A+PC	1	3
SUBB A,direct	2	2	MOVX A,@Ri	1	3
SUBB A,@Ri	1	2	MOVX	1	3
SUBB A,#data	2	2	MOVX A,@Ri,A	1	3
INC/DEC A	1	1	MOVX	1	3
INC/DEC Rn	1	1	PUSH/POP	1	2
INC/DEC direct	2	2	XCH A,Rn	1	1
INC/DEC @Ri	1	2	XCH A,direct	2	2
INC DPTP	1	1	XCH A,@Ri	1	2
MUL AB	1	4	XCHD A,@Ri	1	2
DIV AB	1	4	ACALL addr11	2	2
DA A	1	1	LCALL addr16	3	3
ANL/ORL/XRL A,Rn	1	1	RET/RETI	1	4
ANL/ORL/XRL A,direct	2	2	AJMP addr11	2	2
ANL/ORL/XRL A,@Ri	1	2	LJMP addr16	3	3
ANL/ORL/XRL A,#data	2	2	SJMP rel	2	2
ANL/ORL/XRL direct,A	2	2	JMP @A+DPTR	1	3
ANL/ORL/XRL	3	3	JZ/JNZ/JC/JNC rel	2	3
CLR A	1	1	JB/JNB/JBC	3	4
CPL A	1	1	CJNE A,direct,rel	3	4
RL/RR A	1	1	CJNE A,#data,rel	3	4
RLC/RRC A	1	1	CJNE Rn,#data,rel	3	4
SWAP A	1	1	CJNE	3	5
MOV A,Rn	1	1	DJNZ Rn,rel	2	3
MOV A,direct	2	2	DJNZ direct,rel	3	4
MOV A,@Ri	1	2	NOP	1	1
MOV A,#data	2	2	CLR/SETB C	1	1
MOV Rn,A	1	1	CLR/SETB bit	2	2
MOV Rn,direct	2	2	CPL C	1	2
MOV Rn,#data	2	2	CPL bit	2	2
MOV direct,A	2	2	ANL C,bit	2	2
MOV direct,Rn	2	2	ANL C,/bit	2	2
MOV direct1,direct2	3	3	ORL C,bit	2	2
MOV direct,@Ri	2	2	ORL C,/bit	2	2
MOV direct,#data	3	3	MOV C,bit	2	2

MOV @Ri,A	1	1	MOV bit,C	2	2
-----------	---	---	-----------	---	---

CPU main frequency = crystal frequency \* 56/3, 11.0592MHz crystal corresponds to 206.438MHz main frequency, corresponding to an instruction cycle (1T) of 4.844nS.

Such as:

Under 11.0592 MHz crystal, the following code will output  $206.4384/((2+2)*2)=25.8048$  MHz square wave on the P3.3 IO interface.

```

OUTTEST:CPL    P3.3           ;2T
                AJMP    OUTTEST ;2T

```


## (7) Simulation Debug

With the help of HME05 simulator (need to install the corresponding USB driver), users can connect T5L JTAG interface and debug code IAP and run simulation under Keil development environment.

The following points should be paid attention in simulation debugging:

(1) JTAG interface must be selected to OS CPU, and must be JTAG mode, that is, OS/GUI (PIN#32) = 0 JTAGS (PIN#34) = 1. When the 4.3 inch evaluation board is used for simulation, the jumper pad on the JTAG interface side is disconnected.

(2) The AGDI driver is installed to enable Keil to support T5 and HME05 simulators. After installation, select and configure according to the following figure. After installation, copy the header file of T5LOS CPU (\*.INC or \*.h) to KEIL/C51/INC/DWIN directory.

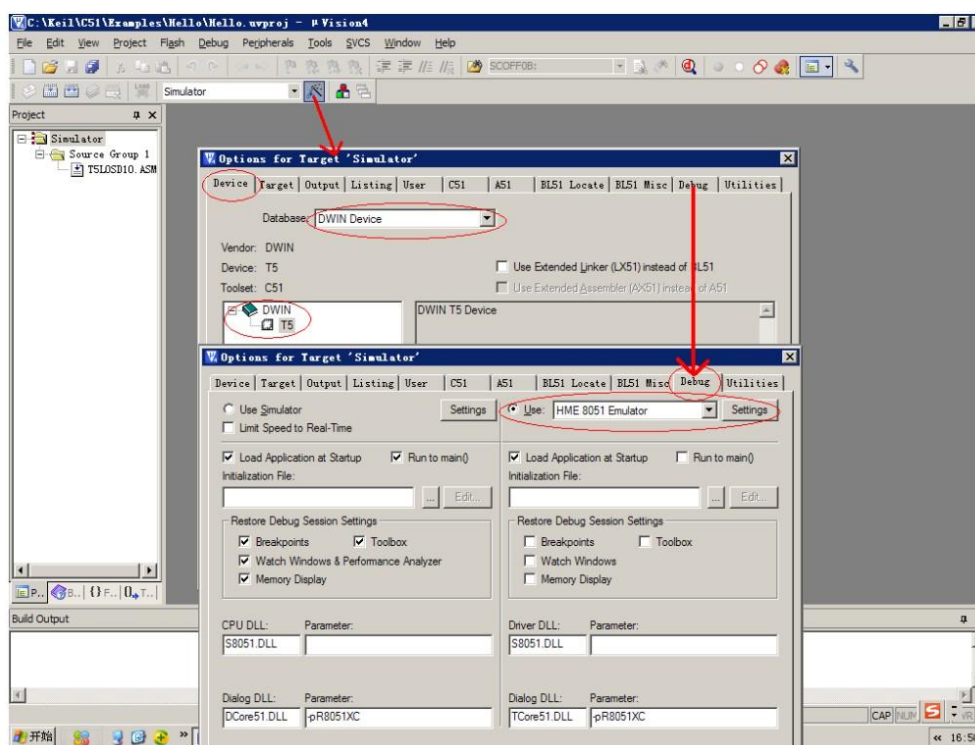

(3) Before setting the breakpoint to read the content of data storage (XDATA), DPC = 0x00 must be ensured, otherwise the data will be misaligned.

(4) Before simulation, it is necessary to ensure that the OS CPU code address 0x00F8 of T5L Flash starts with 0xFF FF 4457 494E 5435, otherwise the JTAG interface of OS CPU is prohibited and HME05 emulator cannot be connected.

(5)Users for standard C or other 8051 platform code migration, please pay attention to SFR header file loading at compile time to select T5L corresponding. INC or. H file. If the SFR definition and T5L definition in customer code are different, you can modify the code or T5L SFR header file to be consistent.

(6)HME05 realizes hardware simulation by downloading code to Code RAM of T5L OS CPU. The code is not burned to Flash in the chip.To burn code into the chip, it is necessary to use SD card interface or UART1 debugging interface. When SD interface is burned, T5L underlying software will automatically change the location of OS code 0x00F8 to 0x0000 (JTAG interface is forbidden) 44 57 49 4E 54 35.

T5L OS CPU adopts the standard 8051 architecture. Except for the slight difference between SFR and extended peripheral access, the instruction set is identical. When the user has the original 8051 code, pay attention to the following aspects and you can complete it quickly:

- According to the hardware design, after reset, the startup.A51 (C51 startup code) or initcpu () program provided by DWIN is used to simply modify and configure T5L-specific SFR and parameter settings. Typical differences are IO, main frequency of timer, baud rate, interrupt, WDT and so on.
- T5L IO output mode is controllable. When switching between input and output modes, PxMDOUT registers should be configured accordingly, otherwise errors will occur.
- Turn off interrupt nesting, EA = 0 for each interrupt service program and set 1 when exiting.
- When using Out-of-chip RAM (XRAM) as data storage in the code, it should be noted that the starting address of T5L 32KB data RAM starts at 0x8000.
- Code 0x00F8 position plus 0xFFFF (or 0x0000 forbid JTAG interface) 44 57 49 4E 54 35.

(6)Accelerate the algorithm of optimizing original code with MDU hardware operation: Move UI and Internet (such as access to DWIN cloud through DWIN WiFi module) function to DGUSII platform, user code is processed by simple read-write DGUS variable space, greatly improve product performance and the efficiency of research and development.



## (8) EK043 Evaluation Board

EK043 evaluation board uses T5L1 to drive 4.3 inch 480\*272 TFT screen, and matches capacitor touch screen. Its main features include:

(1) 11.0592 MHz crystal, 206.4384 MHz main frequency operation, support HME05 simulator.

(1) External 16MB SPI Flash, run standard DGUS II UI;

(2) Power supply and debugging use USB interface;


**1.** The OS CPU 8051 program can be downloaded through the USB interface and automatically reset by hardware;

**2.** It can read and write DGUS variable memory and download pictures and word libraries through USB interface to facilitate DGUS debugging;

**3.** The assembly location of DWIN WiFi module is reserved for easy access to DWIN cloud (both WiFi module and USB occupy UART1 interface, with a baud rate of 921600 bps);

**4.** All interfaces of T5L OS CPU are drawn out with 2.54mm spacing through-hole bonding pad and marked.

**5.** Six AD, ADC0-ADC3, ADC6-ADC7 which can be used by users are drawn out and marked with 2.54mm spacing through-hole bonding pad.

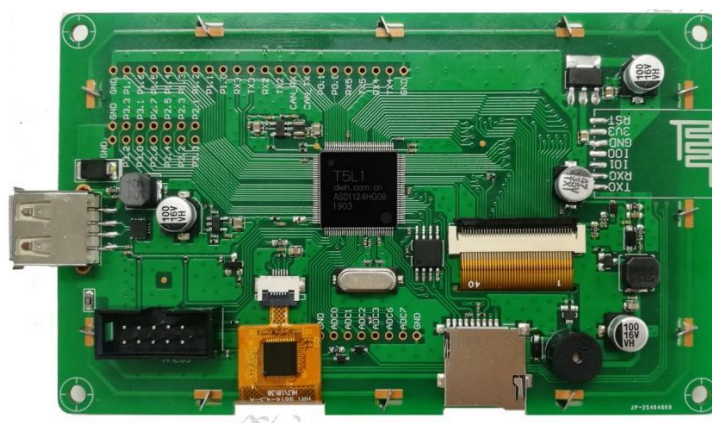

# Appendix 1

Date	Revision	Document version
2019.03.15	First released	V1.0
2019.09.27	Modify some errors in the document.	V1.1

If you have any questions or want to know more about the latest information of DWIN products during the use of this document or DWIN products, please contact us in time:

400 toll-free telephone: 400 018 9008

Enterprise QQ and wechat: 400 018 9008

Enterprise mail: [dwinhmi@dwin.com.cn](mailto:dwinhmi@dwin.com.cn)

Thank you for your support for DWIN. Your support is the driving force of our progress.

Thank you all.